

Commissioning of the ALTO 50 MeV electron linac

J. Lesrel, J. Arianer, M. Arianer, O. Bajeat, J.-M. Buhour, H. Bzyl, F. Carrey, M. Chabot, J.-L. Coacolo, T. Corbin, et al.

► **To cite this version:**

J. Lesrel, J. Arianer, M. Arianer, O. Bajeat, J.-M. Buhour, et al.. Commissioning of the ALTO 50 MeV electron linac. Tenth European Particle Accelerator Conference "EPAC'06", Jun 2006, Edinburgh, United Kingdom. pp.825-827. in2p3-00124992

HAL Id: in2p3-00124992

<http://hal.in2p3.fr/in2p3-00124992>

Submitted on 17 Jan 2007

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

μ s pulse at 100 Hz the beam loading is 4 MeV of 50 MeV. But the first tests were done with only 100 nA current (awaiting for the administrative authorizations for higher current intensity). We have also reduced the repetition frequency at 10 Hz and operate with 250 ns pulse duration.

Transmission between gun and entrance section is 77 % (81% theoretical), and transmission in the section is 96 %.

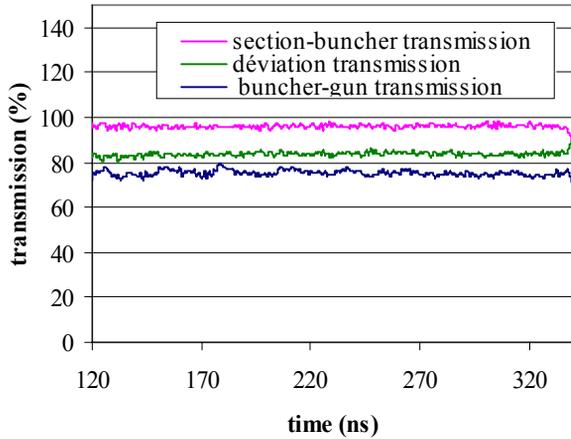


Figure 2: Transmission during the current pulse

The bad transmission in the deviation is a defect of magnetic field created by an ionic pump close to the line which will be moved soon.

The Beam Line

The designed beam line consists of two 65° dipole magnets (R=0.4m) and six magnetic quadrupoles (fig. 4). The first quadrupole doublet is put behind the accelerating section and allows the control of the beam envelope at the entrance of the first dipole. To achieve the achromaticity of the deviation, two quadrupoles are put between the two dipoles and between quadrupoles a tuned slit allows to measure the energy dispersion (fig 3).

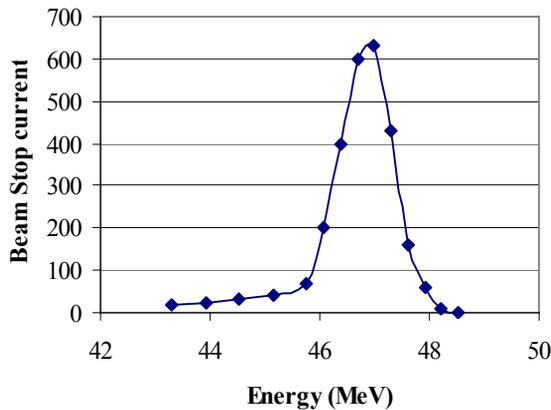


Figure 3: energy dispersion measurement

The beam dimension is adjusted on the PARRNe target using the last quadrupole doublet.

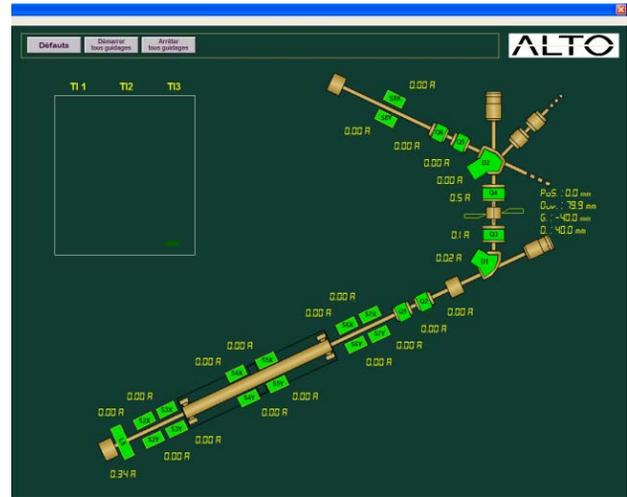


Figure 4: Beam line

The Diagnostics

There are three types of current diagnostics, the two WCM (Wall Current Monitor) are resistive monitors, the three current transformers (TI) and two beam stop (BS) with faraday cage and magnet in order to capture secondary electrons.

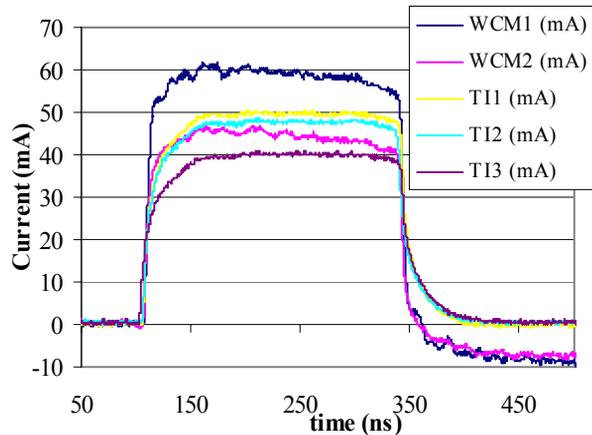


Figure 5: Current diagnostics

The three beam position monitors (BPM) have been taken from the Linac Injector of LEP/CERN. These BPM are the magnetic monitors. We also use a system composed of a CCD and a screen in order to visualize the beam “on line”.

The Control & Command

Alto supervision is done with the PanoramaV8® software. It assumes the acquisition and the Human Machine Interface (HMI) but also the storage history of the machine parameter, alarm and receipt functionalities. This software is running on industrial XP-PCs (3Ghz, 2Go). Acquisition servers (two) are working in redundancy.

They are located close to the accelerator. HMI is located in the main control room of the building. A 6-knob box, is used alternatively with a mouse and a keyboard to tune the process. General overview of the C&C is given on the figure 6 and some of the HMI screens on figure 1 and 4.

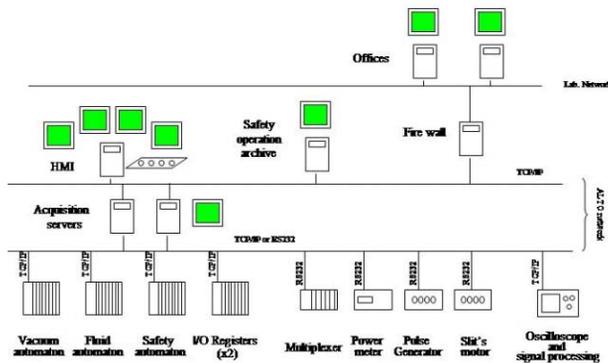


Figure 6: C&C overview

The Security

The system of safety was carried out on the basis of AFNOR NF M62-105 standard, related to particle accelerators of installations. This system is elaborated around an automat of Safty Integrity Level 3 according to IEC 61.508 standard approved for safety. All automat entries are doubled and exits as well as their states are self-checking.

The Target-Ion Source System

To produce neutron-rich nuclei by photo-fission, a thick target containing 72 g of uranium in a standard form of UCx is used. The properties of such a target is described in [2]. The target is heated up to about 2000 °C inside a 20 cm long Ta oven in the middle of which a transfer tube allows the neutron-rich nuclei produced to effuse to the ion source. The first ion source used is an ISOLDE standard plasma source at high temperature.

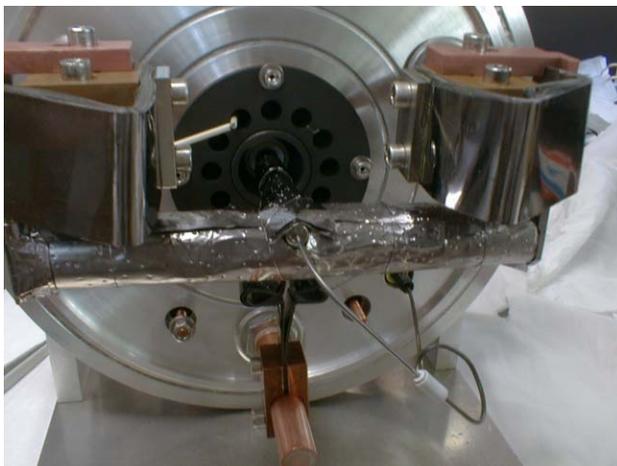


Figure 7: The target ion source system

The Vacuum

The vacuum system is composed of six 240 l/s sputter ion pumps. At the entrance of the RF cavities, the section is pumped by two 70 l/s sputter ion pumps. The linac is maintained at a residual pressure lower than 10^{-7} mbar. The whole vacuum system is controlled by a Siemens automat.

CONCLUSIONS AND PERSPECTIVES

The first experiment of photo-fission took place at the end of June 2006 with a current beam of 100 nA. As soon as we receive the safety authorization, a new experiment will be performed with an average current of 10 μ A.

Furthermore, ALTO will experimental applications in other fields such as biology, biochemistry, industry etc...

ACKNOWLEDGMENTS

The authors would like to thank the Alto team for their technical assistance and helpful discussions. They would also like to thank G. Rossa (CERN) for collaborating and equipments loans.



Figure 8: The ALTO Team

This work was supported by the Conseil Régional Ile de France, the Conseil general du department de l'Essonne and CNRS-IN2P3.

REFERENCES

- [1] S. Essabaa *et al*, Nucl. Instrum. and Meth. B204 (2003) 780.
- [2] C. Lau *et al*, Nucl. Instr. and Meth. B204 (2003) 246.
- [3] C. Lau *et al*, Rev. Sci. Instrum. 77(2006) 03A706.
- [4] M'garech ,thesis in french, Utilisation de faisceaux d'électrons pour la production des noyaux radioactifs par photo-fission (2004) (IPNO-T-04-0)