



HAL
open science

Simulation of Multiknobs Correction at ATF2

S. Bai, J. Gao, P. Bambade, B. Bolzon

► **To cite this version:**

S. Bai, J. Gao, P. Bambade, B. Bolzon. Simulation of Multiknobs Correction at ATF2. 1st International Particle Accelerator Conference (IPAC 2010), May 2010, Kyoto, Japan. Joint Accelerator Conferences Website, pp.4512-4514, 2010. in2p3-00497021

HAL Id: in2p3-00497021

<https://hal.in2p3.fr/in2p3-00497021>

Submitted on 2 Jul 2010

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

SIMULATION OF MULTIKNOBS CORRECTION AT ATF2*

Sha Bai, Jie Gao (IHEP Beijing, Beijing), Philip Bambade (LAL, Orsay; KEK, Ibaraki), Benoit Bolzon (LAPP, Annecy, France)

Abstract

The ATF2 project is the final focus system prototype for ILC and CLIC linear collider projects, with a purpose to reach a 37nm vertical beam size at the interaction point. During initial commissioning, we started with larger than nominal β -functions at the IP, to reduce the effects from higher-order optical aberrations and thereby simplify the optical corrections needed. We report on simulation studies at two different IP locations developed based on waist scan, dispersion, coupling and β function multiknobs correction in the large β optics of ATF2, in the presence of two kinds of magnet inaccuracies (quadrupole gradient and roll errors) to generate all possible linear optics distortions at the IP. A vertical beam size which is very close to the nominal beam size is obtained based on the simulation study.

INTRODUCTION

ATF2 [1,2] is the test facility with an ILC type final focus line, to reach a final beam size of 37 nm. How to tune this small nanometer beam size in both simulation and experiment is a crucial point. During the initial commissioning, until March 2009, we used a large β optics with 20 times β_x (0.08m) and 800 times β_y (0.08m) at the IP and turned off all the five sextupoles in ATF2 line to reduce the high-order optical aberrations [3]. In April 2009, we started using 20 times β_x (0.08m) and 100 times β_y (0.01m) (see Table 1). For the normal optical correction methods which are planned for the designed optics ($\beta_y=0.0001$ m) are based on sextupoles, while for the initial commissioning, we needed something different for rough adjustments in the large β optics mode. During the commissioning, BSM [4] is used to measure beam size below 3 microns, in correcting while for larger beam sizes, wire scanners [5] with 10 and 5 micron diameter are used.

Table 1: Beam Parameters with Nominal and Large β Optics

	Large β optics		Nominal β optics	
	Nominal IP	Wire scanner	Nominal IP	Wire scanner
β_x (cm)	8.0	9.90	0.4	0.495
β_y (cm)	1.0	1.84	0.01	0.0184
σ_x (μ m)	12.7	14.1	2.80	3.15
σ_y (μ m)	0.343	0.466	0.0343	0.0466
QD0 current(A)	130.34	105.24	130.34	105.24
QF1 current(A)	70.84	66.87	70.84	66.87

*Work supported in part by the Agence Nationale de la Recherche of the French Ministry of Research (Programme Blanc, Project ATF2-IN2P3-KEK, ANR-06-BLAN-0027) and by NSFC 10775154 and 10525525.

MULTIKNOBS CORRECTION ANALYSIS

Since the beam line is not perfect, but with every kinds of strength errors of the magnets and also alignments, rotation errors, etc... Thus, when the beam went through the beam line with these imperfect magnets, particle orbits will be different from the ideal ones, in result that a larger than nominal beam size was got at the IP, which is beyond our expectation. In order to train correcting those imperfections or errors of the beam line, we choose 1mrad rotation errors and 1% strength errors at all quadruples in ATF2 line to see obvious effect and simulated the scanning of the minimum vertical beam size using the coupling and dispersion corrections with skew quadrupoles, the α waist scan knobs with final doublet and the β_y knob with QM12.

Simulation Studies on Waist Scan Multiknob at Post-IP (IP+40cm)

Simulations using the large β optics with $\beta_x = 0.08$ m and $\beta_y = 0.01$ m were done to test adjusting the beam waists at the IP in the presence of errors independently in horizontal and vertical planes. QD0 and QF1 strengths were found fitting with the MAD program to get:

- 1) $\alpha_x = 0.1, \alpha_y = 0.0$ $\delta_{QD0/QD0} = -8.99e-4$, $\delta_{QF1/QF1} = -5.37e-4$
- 2) $\alpha_x = 0.0, \alpha_y = 0.1$ $\delta_{QD0/QD0} = -7.72e-3$, $\delta_{QF1/QF1} = -1.36e-3$

For waist errors of reasonable magnitudes, adjustments can be computed efficiently scaling these coefficients linearly. A first application study was done with random relative field errors in all ATF2 quadrupoles, with RMS of 0.01. Fig. 1 and 2 show the effect of correcting 100 seeds using the defined $\alpha_{x,y}$ multiknobs. The red and blue histograms show the beam sizes before and after scans to find the minimum values. Residual horizontal dispersion is generated by the above procedure for quadrupole errors in the non-dispersive parts of ATF2. The corresponding contribution to the horizontal beam size was however found small enough to be neglected for this set of errors, so the waist scan on the horizontal plane seems perfect. While for the vertical plane, the correction is not so good due to a large tail in the blue histogram, that's because the β function change at IP for this set of errors, so a more complete simulation study on multiknobs correction was needed and is described in the following section.

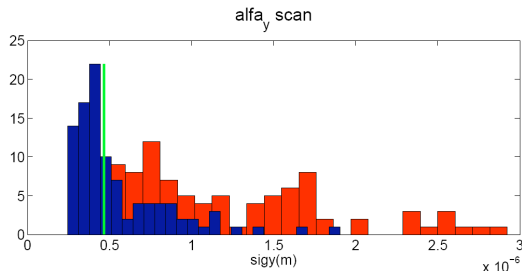


Figure 1: α_y multiknob orthogonal waist scan with large β optics at IP

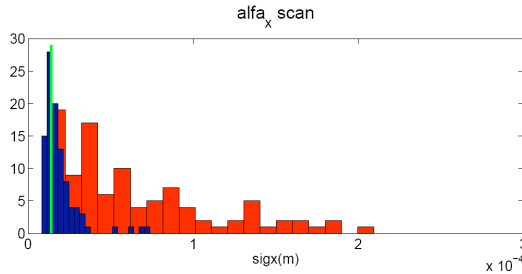


Figure 2: α_x multiknob orthogonal waist scan with large β optics at IP

Dispersion Correction Multiknob at Post-IP.

Dispersion correction use the QS1X/QS2X sum knob (QS1X+QS2X) for which QS1 and QS2 have the same currents. The phase advance between QS1 and QS2 is close to π , designed not to introduce significant coupling with sum knob (QS1X+QS2X).

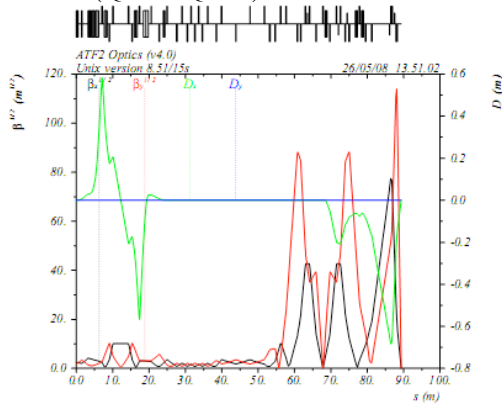


Figure 3: Twiss parameter of the ATF2 line

To check the residual coupling effects from the sum knob, the strength of QS2 was varied around the one of QS1 (fixed) to find the minimal emittance, and the result shows that minimal emittance exists at 13.4pm with quasi sum knob (QS1+70%QS2) [6]. However after check to compare the minimum vertical beam size corrected with quasi knob (KLQS2X=70%KLQS1X) and using the original definition (KLQS1X=KLQS2X), there is almost no difference in the minimum vertical beam size which can be obtained.

Coupling Correction Multiknobs at Post-IP

Since the dispersion correction designed not to introduce coupling but not so perfect and will introduce a little coupling, meanwhile because of the roll errors of the

quadrupoles, a coupling correction multiknob with skew quadrupoles QK1, QK2, QK3, QK4 [6] is introduced in non-dispersion region so as to have no influence on the dispersion correction. We choose first $\langle xy \rangle$ knob and then $\langle x'y \rangle$ knob to correct coupling to minimize the vertical beam size at Post IP wire scanner.

Table 2: Coupling Correction Multiknobs with QK1~4

Knob (Normalized)	QK1X	QK2X	QK3X	QK4X
$\langle xy \rangle$	1	-0.4667	-0.5500	-0.8722
$\langle xy' \rangle$	-0.8722	-0.5500	0.4667	-1
$\langle x'y \rangle$	0.5500	0.8722	1	-0.4667
$\langle x'y' \rangle$	-0.4667	1	-0.8722	-0.5500

Table 3: Coupling Correction Multiknobs Orthogonal

Correlations	1 st knob	2 nd knob	3 rd knob	4 th knob
$\langle xy \rangle$	0.83	-0.12	0.00	0.00
$\langle xy' \rangle$	0.12	0.83	-0.00	0.00
$\langle x'y \rangle$	0.00	-0.00	0.83	-0.12
$\langle x'y' \rangle$	0.00	-0.01	0.12	0.83

β function Correction Multiknob at Post-IP

When introducing 1% strength errors, the matching quads may change the β function at Post-IP wire scanner. That's why to use matching quad to correct α_x , β_x , α_y and β_y . Choose QM12 that has a good performance which will be to correct β_y with only small changes to α_y instead of fitting all the matching quadrupoles QM12, QM13, QM14, QM15, QM16.

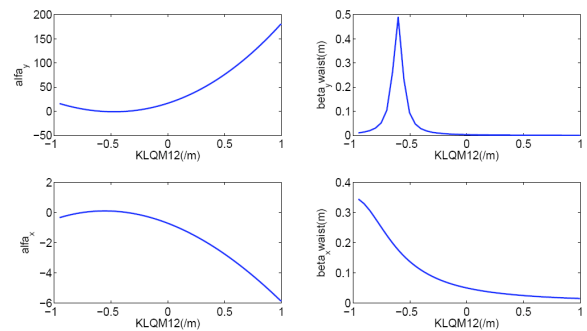


Figure 4: Strength change of QM12 influence on α_x , β_x , α_y and β_y .

SIMULATION ON MULTIKNOBS CORRECTION

Simulation to scan the minimum vertical beam size (tracking in MAD with energy spread 0.0008) using the coupling and dispersion corrections with skew quadrupoles, the α waist scan knobs with final doublet and the β_y knob with QM12 were done at the Post-IP wire scanner. Scan in several steps in the strength limits of all the magnets in only a single iteration. Fig. 5 shows the

results after the multiknobs correction. The blue histograms show the beam sizes after successive multiknobs scans to find the minimum values, while the green and blue line show the nominal beam size and average beam size after correction.

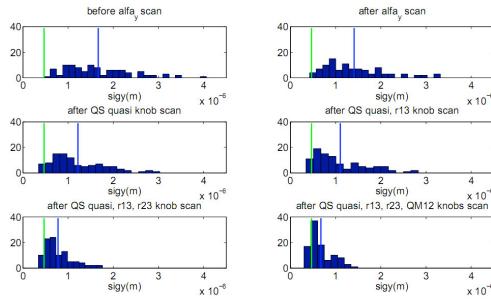


Figure 5: After multiknobs correction to find the minimum vertical beam size at Post-IP

The vertical beam size goes down to $6.7e-7m$ which is close to the nominal vertical beam size $4.67e-7m$, but at around 1 micron, there are some badly corrected seeds, amounting to about 15% of the total. And this is caused by the rotation errors of final doublet. A simulation study of the multiknobs correction without the rotation errors on the final doublet is shown in Figure 6.

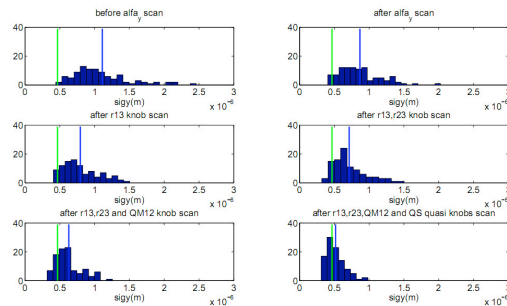


Figure 6: After multiknobs correction to find the minimum vertical beam size at Post-IP without rotation errors on QD0&QF1

When shifting back from the Post-IP to IP, the vertical beam size simulated is preserved that it makes tuning at the post-IP feasible to prepare the beam for the BSM.

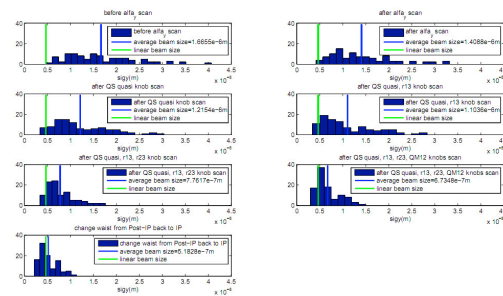


Figure 7: Results after shifting back to IP

As stated before, the simulation is scanned in all the magnet strength limits, but there is an exception. The QK2, QK3 which have the strength limit 5A before were found not big enough for the scan. The power supplies

were changed to match the requirements defined by this study[7].

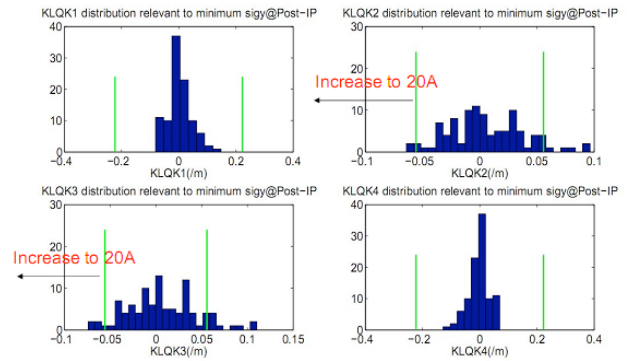


Figure 8: QK1~4X strength distribution relevant to minimum σ_y at PIP

Summary and Prospects

Large β optics mode has been chosen for the initial commissioning, and in this optics mode, a simulation of coupling, dispersion, waist scans and β function correction multiknobs was done in the presence of magnet strength and roll errors. A vertical beam size which is very close to the nominal beam size was obtained. In the ATF2 commissioning, a reasonable initial correction of the beam size could be realized by setting these knobs in a single iteration according to this procedure.

REFERENCES

- [1] ATF2 proposal, KEK-Report-2005-2, SLAC-R-771.
- [2] P. Bambade et al., "Present status and first results of the final focus beam line at the Accelerator Test Facility" PhysRevSTAB.13.042801.
- [3] S. Bai et al., "Optical configurations with variable β^* at different IP locations in ATF2", ATF-Report 08-05 (2008)
- [4] T. Shintake, Nucl. Instr. Meth. A311, 453 (1992)
- [5] C. Field, "The Wire Scanner System of the Final Focus Test Beam", November 1994, SLAC-PUB-6717
- [6] B. Bolzon and P. Bambade, "Effect of skew quad corrections at post-IP wire-scanner", presentation in 8th ATF2 project meeting, 2009-06-10.
- [7] N. Terunuma, private communication.