

Proposal of a new Hcal forward geometry without crack

N. Geffroy, Christian Girard, Y. Karyotakis, M. Oriunno, M. Breidenbach, K. Krempetz

► **To cite this version:**

N. Geffroy, Christian Girard, Y. Karyotakis, M. Oriunno, M. Breidenbach, et al.. Proposal of a new Hcal forward geometry without crack. 2008, pp.4. in2p3-00339357

HAL Id: in2p3-00339357

<http://hal.in2p3.fr/in2p3-00339357>

Submitted on 17 Nov 2008

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Laboratoire d'Annecy-le-Vieux
de Physique des Particules

LAPP-TECH-2008-07

November 2008

Proposal of a new Hcal forward geometry without crack

N. Geffroy, C. Girard, Y. Karyotakis

LAPP Laboratoire d'Annecy-le-Vieux de Physique des Particules
Université de Savoie CNRS/IN2P3
BP. 110, F-74941 Annecy-le-Vieux Cedex, FRANCE
Phone: +33-4-50-09-16-00, Fax: +33-4-50-27-94-95, E-mail:
nicolas.geffroy@lapp.in2p3.fr

M. Oriunno, M. Breidenbach

SLAC
Stanford Linear Accelerator Center
2575 Sand Hill Road, Menlo Park, CA 94025, USA
Phone : +1-650-926-3300, E-mail: oriunno@slac.stanford.edu

K. Krempetz

Fermilab, Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, IL 60510-5011, USA
Phone : +1-630-840-3000, Fax : +1-630-840-4343, E-mail: krempetz@fnal.gov

Abstract

This paper deals with a proposal of a new Hcal forward design.

The calorimeter described below is not projective with respect to the beam axis. Consequently there is no crack in the detection, and then no loss of information.



CENTRE NATIONAL
DE LA RECHERCHE
SCIENTIFIQUE

IN2P3

INSTITUT NATIONAL DE PHYSIQUE NUCLÉAIRE
ET DE PHYSIQUE DES PARTICULES



UNIVERSITÉ
CHAMBERY
ANNECY SAVOIE

I. INTRODUCTION

The Hcal forward is an end cap of the Hcal barrel. The “classical” configuration consists (most of the time) in twelve identical trapezoidal modules (cf. Figure 1). Consequently each module is projective with respect to the beam axis: cracks exist in such a design.

A study concerning the geometry of a non projective Hcal barrel has been previously carried out [1]. As a follow up a second study for the Hcal forward to be non-projective as well is performed.

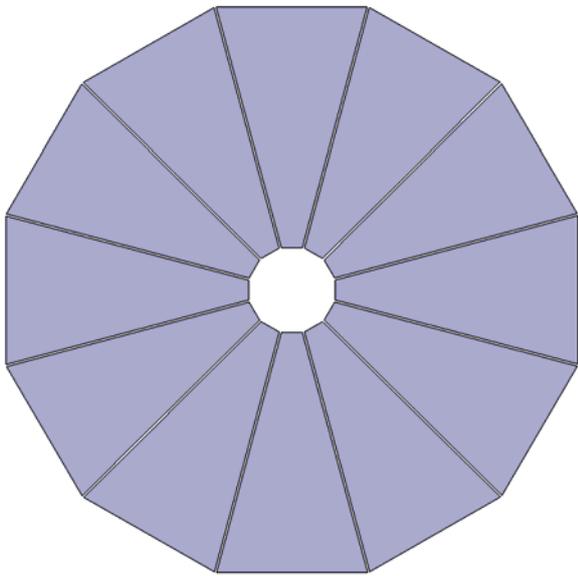


Figure 1: classical geometry

Note that for such a “classical” geometry, chambers must be inserted radially. Moreover, the shape of the latter can be more or less difficult to fabricate.

II. HCAL FORWARD GEOMETRY PROPOSAL

A. Absorbers.

The Hcal forward is a cantilever structure: fixed on the endcap Iron, free at the other extremity. The aim of the study was to develop a realistic design without cracks, that is to say neither in the absorbers, nor in the chambers.

A possible geometry could be to realize a stack of large absorber plates along Z-direction. Each layer could be made of only one plate, with a hole in the middle for the beam pipe. However it seems to be more realistic (and maybe easier for the assembly procedure) to divide each layer into two parts along the vertical axis. Figures 2 and 3 describe the layers, each of them composed of two plates.

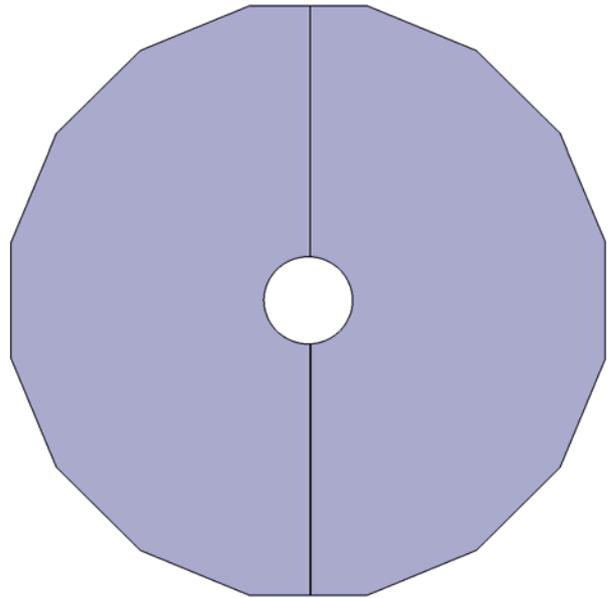


Figure 2: Face view of the Hcal forward proposal

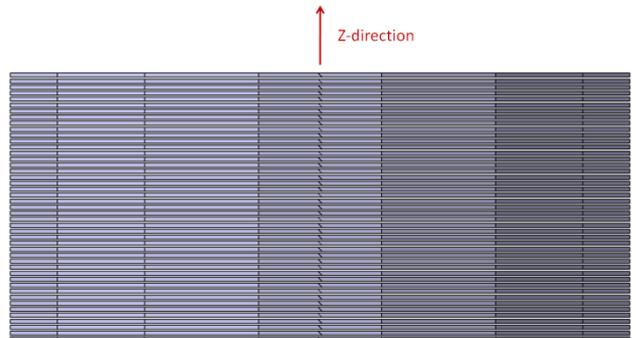


Figure 3: Top view of the Hcal forward proposal

Moreover in order not to have a crack between these two parts, it could be a interesting option to realize a bevel in the interface region of the 2 plates, and to position these parts a close as possible (See Figure 4).

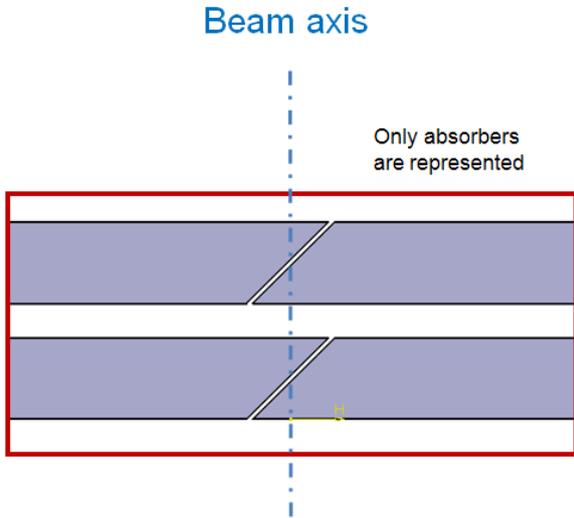


Figure 4: Zoom on the beveled plates of two layers (top view)

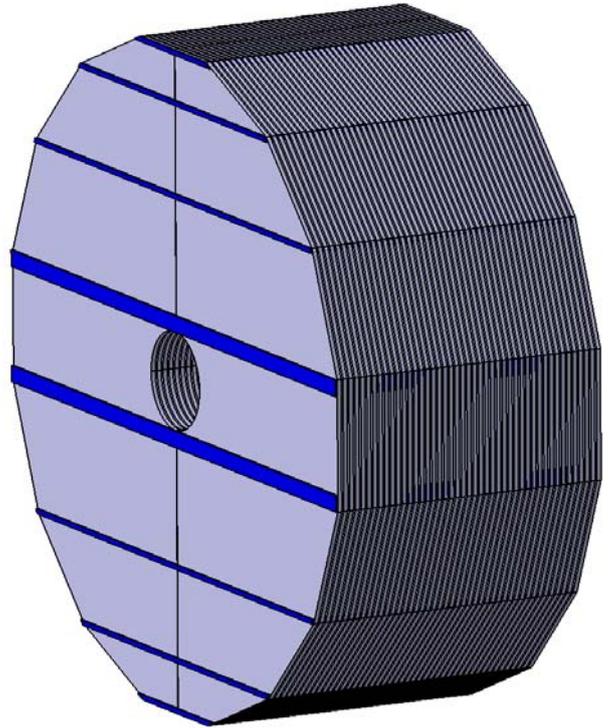


Figure 5: Horizontal beams (in blue) play the role of spacers

The Hcal forward being a cantilever structure, each layer must be firmly fixed on the previous one. The very first layer is fixed on the endcap Iron. The following ones are screwed via spacers, to ensure a constant distance between two consecutive absorbers (for the chambers to be inserted).

Thus, according to Figure 5, horizontal beams are used to play the role of spacers. The next plates, inside which counterbored holes (for fixing screws) are previously machined, can be then fastened.

B. Chambers

Unlike the “classical” geometry, for which the chambers must be inserted radially, this new design allows chambers to fit into the Hcal forward laterally (cf. Figure 6).

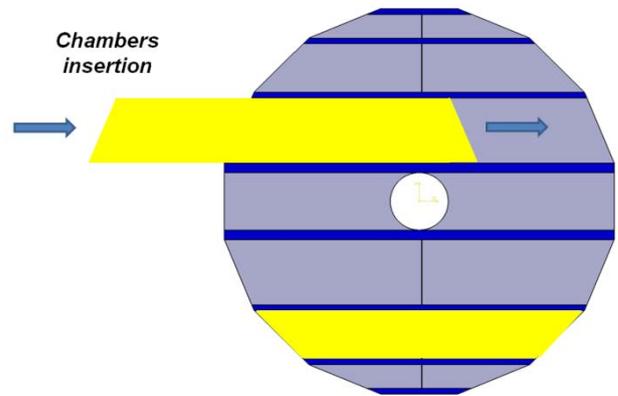


Figure 6: Chambers are inserted laterally along spacers

Moreover, given that every spacers are in a horizontal position (with respect to the gravity), these chambers are maintained without any other device.

Note that the different planes (perpendicular to the layers) defined by the spacers are not projective. There is consequently no crack in the Hcal endcap.

Moreover, the shape of the Hcal forward is a polygon with sixteen edges (cf. Figure 7). Indeed, with such a polygon, the size of one edge is very close to the internal diameter of the endcap. Then an external boundary with 16 edges is very useful and consistent for the chambers to fit the beam axis region

Finally, according to Figures 7 and 8, chambers can be inserted either from the left, or from the right.

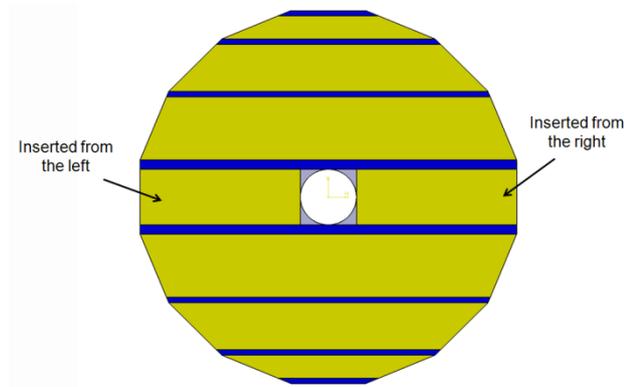


Figure 7: Chambers fit well the beam region

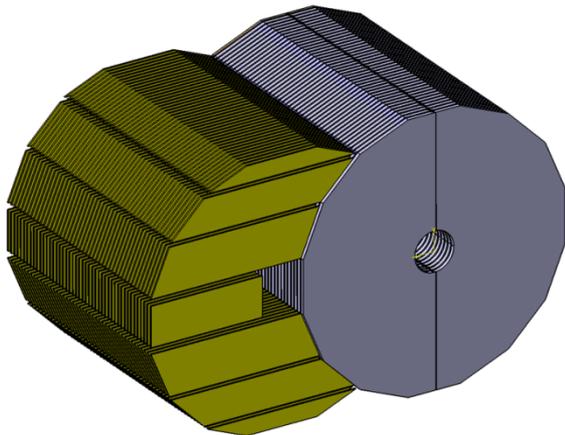


Figure 8: 3D View of the Hcal forward during chambers insertion

III. CONCLUSION

A new Hcal forward design, avoiding cracks, has been studied. To associate such geometry with the design of the Hcal barrel (cf. Figure 9) could be a good option to cancel cracks.

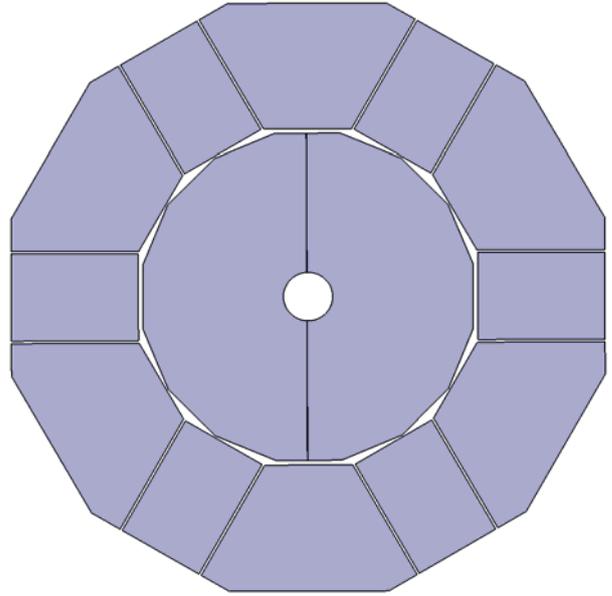


Figure 9: Hcal barrel and Hcal forward (Face view – Z-direction)

IV. REFERENCES

[1] N.Geffroy et al, “Proposition of a new Hcal geometry avoiding cracks in the calorimeter”, LAPP technical note September 2008:

<http://hal.in2p3.fr/in2p3-00324823/fr/>